

SPECIFICATION

NEXLEDS®
NEXLEDS LTD



11 inch



14 inch



16 inch






LED Ceiling Light

NXFMDR11-18W / NXFMDR14-26W / NXFMDR16-33W

Specification:

| MODEL NO. : | NXFMDR11-18W | NXFMDR14-26W | NXFMDR16-33W |
|-----------------|-----------------------------|--------------|--------------|
| WATTAGE : | 18W | 26W | 33W |
| POWER FACTOR : | >0.9 | >0.9 | >0.7 |
| LUMEN : | 1300 lm | 1850 lm | 2300 lm |
| PRODUCT SIZE: | 11 inch | 14 inch | 16 inch |
| PRODUCT NAME : | LED Ceiling Light | | |
| VOLTAGE : | AC120V; | | |
| WORKING TEMP :: | -20-50(°C) | | |
| CRI(RA) : | >80 | | |
| COLOR : | White Color | | |
| LIGHT SOURCE : | Sanan Chip | | |
| LIFE TIME : | 50000 hrs | | |
| BEAM ANGLE : | 120° | | |
| PRODUCT SIZE : | Dry Location; Damp Location | | |
| IP : | Home, Shop, Hotel | | |
| APPLICATION : | 5 years | | |
| WARRANTY : | ETL, ES | | |
| STANDARD : | Adjustable CCT | | |
| COLOR TEMP : | (3000K-4000K-5000K) | | |

Dimension:

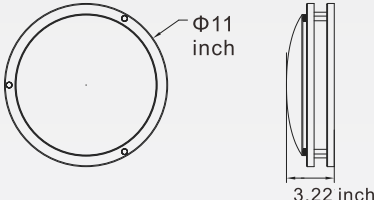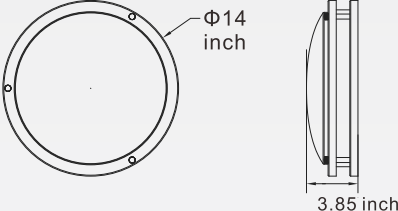
| | | |
|--|--|--|
| <p>11 inch double ring ceiling light</p>  | <p>14 inch double ring ceiling light</p>  | <p>16 inch double ring ceiling light</p>  |
|--|--|--|

Features:


1. Led source use high bright LED chip, energy saving and pro-environment, lighting stable and long lifespan;
2. Optical-grade PC lampshade, the light is good, anti-aging, difficult to damage;
3. High heat conduction aluminum alloy shell, good heat dissipation, vacuum dust-free spray, anti-corrosion, no stripping;
4. Radiate light protection design, won't affect the lighting effects because of weather.

Installation :

1. Unscrew the screw and divide the luminaire into three parts.




2. Connect the wires well

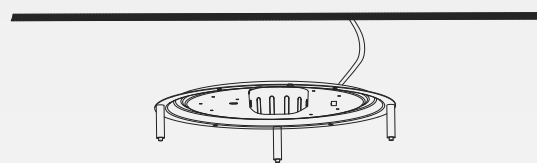

3. Fix the bottom plate to the wall



4. Push the light up and tighten

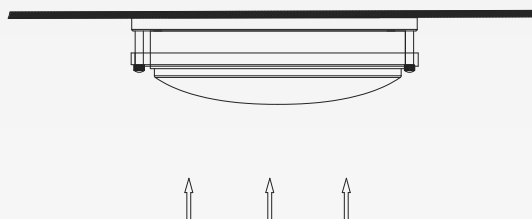

Structure :

Selector switch


Choose your favorite correlated color temperature (CCT,3000K/4000K/5000K) from 3 options using the switch on the LED board

- 1.Input Voltage: 120V/AC
- 2.Frequency: 50/60Hz
- 3.Working Temperature:-20°C--+45°C
- 4.Installation Height: 1-4m
Standard Height :2.5m

Trim Ring

Lamp Cover

Selector switch
(3000K,4000K,5000K)

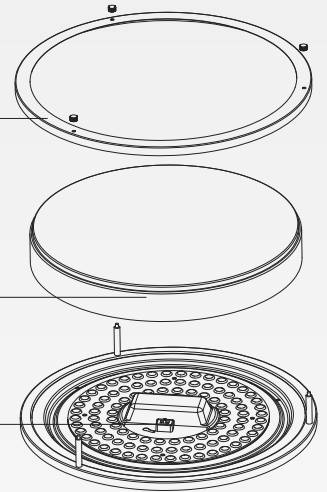

Warning :

WARNING: RISK OF ELECTRICAL SHOCK

Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply; Verify that supply voltage is within right and reasonable limits. Connect the fixture with 120V 50/60Hz power supply; Make all electrical and grounded connections in accordance with the National Electrical Code and applicable local code requirements;

All wiring connections should be capped with UL approved wire connections.

WARNING: RISK OF BURN

Wear gloves and safety glasses at all times when moving luminaire from carton, installing, servicing or performing maintenance; Avoid direct eye exposure to the light source while it is on. LED lights are very bright. Do not stare LED light beam in any case. Or this may cause irreparable damage to the eyes.; Allow fixture to cool before handling. Do not touch enclosure or light source; Do not exceed maximum wattage marked on luminaire label.

WARNING: BE WARE OF FIRE

