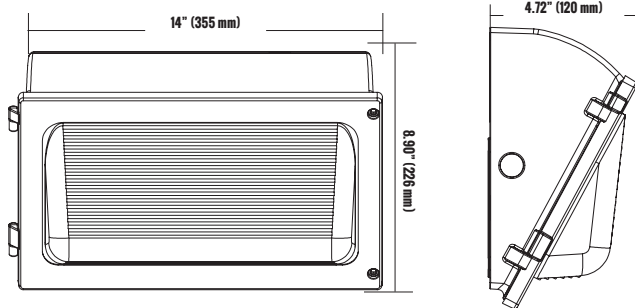


PRODUCT CODE: WP5M-M50WCOP-CD
MULTI-WATTAGE & 3CCT LED WALL PACK WITH PHOTOCEL


PRODUCT DESCRIPTION

Etlin-Daniels newest generation of WP5M-M series LED Classic Wall Packs offer an easy to install and high efficiency solution to replace inefficient HID wall packs, or for new construction projects. Available with Multi-Wattage and 3CCT switching, in 120-347V, both available products are the same size housing, allowing for reduced accessories. One Dark Sky Compliant Shield option and one wire guard option.

The durable, ultra-slim die-cast classic housing comes with 4 available 1/2" conduit hubs: 1 on the back, 1 on each side and one on the bottom. The Borosilicate glass lens diffuses the light source providing uniform distribution. There is a built-in DC photocell which can be disabled, and the IP65 Wet Location rating allows for secure performance over the long fixture life.

For additional energy savings, take advantage of the 0-10V Continuous Dimming. The WP5M-M series is the perfect option for commercial, industrial, healthcare, residential, retail and hospitality facilities.

FEATURES

- Outdoor LED Light Source.
- Light weight, ultra-slim heavy duty die-cast aluminum body
- High efficiency impact resistant Borosilicate glass refractor for uniform illumination
- Wattage selectable switch - 30W / 40W / 50W.
- 3CCT switch - 3000K / 4000K / 5000K
- 120-347V
- Easy to install housing with spider pattern knockouts
- IP65 Wet Location rated
- 0-10V Continuous Dimming
- Dark Sky Compliant Shield and Wire Guard available
- 5 year warranty
- L70 - 50,000 hours
- IK08 Rated
- DLC 5.1 Premium

PRODUCT SPECIFICATIONS (OPTICAL DATA)

PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

LED TYPE	LED QTY	WATTAGE	COLOR TEMPERATURE	LUMENS	SYSTEM EFFICACY	CRI	POWER EFFICIENCY	POWER FACTOR	HARMONIC DISTORTION
LUMILED	144 CHIPS	30W - 3000K - 4040 LM / 4000K - 4333 LM / 5000K - 4327 LM 40W - 3000K - 5130 LM / 4000K - 5483 LM / 5000K - 5334 LM 50W - 3000K - 6160 LM / 4000K - 6788 LM / 5000K - 6480 LM			125 - 135 LM / W	>70 CRI	>86%	>0.95	<20%

PRODUCT SPECIFICATIONS

VOLTAGES	POWER FREQ.	FIXTURE MATERIAL	INGRESS PROTECT	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE
120-347V	50-60HZ	ALUMINUM / BOROSILICATE GLASS LENS INCLUDED	IP65	>50,000 HOURS	-40°C ~ +45°C -40°F ~ +113°F	-40°C ~ +45°C -40°F ~ +113°F	14 X 8.9 X 4.72 INCHES (355 X 226 X 120 MM)	15.95 X 11.61 X 7.67 INCHES (405 X 295 X 195 MM)



ADDITIONAL INFORMATION

INSTALLATION METHOD

WALL MOUNT

FIXTURE COLOR

DARK BRONZE

CONTROL TYPE

**PHOTOCELL
0-10V CONTINUOUS DIMMING**

PRODUCT CODE: WP5M-M50WCOP-CD
MULTI-WATTAGE & 3CCT LED WALL PACK WITH PHOTOCEL

DLC LISTING

ED Model Number	Technical Requirements Version	Product ID	Listed Model Number	Category	Primary Use Designation
WP5M-M50WCOP-CD	DLC 5.1 Premium	S-QM7P10	WP5M-M50WCOP-CD	Outdoor Luminaires	Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires

CERTIFICATIONS

DRIVER/LED CHIP

ACCESSORIES


CAN ICES-005 (B) / NMB-005 (B)

**VISOR PART#:
WP5M-M-RF-DB**

**WIRE GUARD PART#:
WP5M-M-WG-DB**

ORDERING INFORMATION - WP5M SERIES

SERIES	WATTS	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	PHOTOCELL	LENS	FINISH
E.G. WP5M	M50	W	C	O	P	C	D
WP5M - WALL PACK	M50 -	W - 120 - 347V	C - CHANGEABLE COLOR TEMP.	O - 0 - 10V	P - PHOTOCELL	C - CLEAR	D - DARK BRONZE
MEDIUM, DLC	MULTI WATTAGE		- 3000K / 4000K / 5000K	CONTINUOUS	INSTALLED		
	50W MAX			DIMMING			

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · **Tel:** 416.741.7336 · **Fax:** 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com